

## Quick and Accurate Weighing Guaranteed

Bright LED display

Weighing up to 30kg

Rechargeable battery



*Designed for dependability and durability at a practical price!*

### Standard Features Include:

- Four popular capacities (30kg, 60kg, 150kg, 300kg) in 3 industry-standard sizes (300 x 350 mm, 400 x 500 mm and 500 x 600 mm)
- Polished 430 stainless steel pan and column with painted carbon steel frame and aluminum alloy IP65 load cell
- Column mount welded to frame ensures stability of column and indicator when in use
- Indicator features a high-impact durable ABS housing with reversible face for either wall, column or table-top mounting
- kg, g weighing units
- 25mm high LCD weight display with high-contrast backlight
- Built-in RS232 for printing and data connection
- AC adapter and internal rechargeable lead acid battery

## Specifications

## KK-15W

Default Capacity x Readability*	6 lb x 0.001 lb 96 x 0.02 oz 3 kg x 0.0005 kg 3,000 g x 0.5 g	15 lb x 0.002 lb 240 x 0.05 oz 6 kg x 0.001 kg 6,000 g x 1 g	30 lb x 0.005 lb 480 x 0.1 oz 15 kg x 0.002 kg 15,000 g x 2 g	60 lb x 0.01 lb 96 x 0.2oz 30 kg x 0.005 kg 30,000 g x 5 g
NTEP Certified Capacity x Readability*	6 lb x 0.002 lb 96 x 0.05 oz 3 kg x 0.001 kg 3,000 g x 1 g	15 lb x 0.005 lb 240 x 0.1 oz 6 kg x 0.002 kg 6,000 g x 2 g	30 lb x 0.01 lb 480 x 0.2 oz 15 kg x 0.005 kg 15,000 g x 5 g	60 lb x 0.02 lb 960 x 0.5 oz 30 kg x 0.01 kg 30,000 g x 10 g
Linearity (g)	±0.5 g	±1.0 g	±2.0 g	±5.0 g

\*Based on calibration unit used (kg or lb)

### General Specifications

Platform Size (w x d)	13.5 x 9 in / 34 cm x 23 cm
Scale Dimensions (w x d x h)	13.5 x 14.5 x 4.5 in / 34.3 cm x 36.8 cm x 11.4 cm
Shipping Dimensions (w x d x h)	17 x 17 x 8.5 in / 43.8 cm x 43.8 cm x 21.6 cm
Weight (lb/kg)	8.6 lb / 3.9 kg
Stabilization Time	1 – 4 seconds depending upon filter selection
Keyboard	4 function membrane switches
Weighing Units	lb, kg, g, oz
Display	Backlit LCD, 0.99 in / 25.4 mm
Power	AC Adapter or 6 "C"-type Batteries
Typical Battery Life	Up to 100 hours
Span Calibration	30% to 100% of capacity
Auto Zero Tracking	Off, 0.5, 1 or 3 divisions
Construction	Stainless steel weighing pan, ABS plastic housing
Protection	IP43
Operating Temperature	14° F to 113° F / -10° C to 45° C
Storage Temperature	-4° F to 140° F / -20° C to 60° C

### Standard Features

RS232 bi-directional interface, backlit LCD display, Net/Gross/Tare function, auto-off timer, low battery warning, adjustable averaging and stability levels, retain zero data, auto-zero tracking, leveling feet, leveling bubble.


### Optional Accessories

In-use cover, carrying case, RS232 interface cables.

### Compliance

- **Electrical/Emissions:** CE listed, meets AS/NZS4251.1 Emission/AS/NZS4252.1 Immunity, FCC Class B Part 15 operation, Industry Canada Class A. cULus AC power pack.
- **Legal-for-Trade:** NTEP Certified (certificate #02-009A2)OIML R76 Class III (certificate R76/1992-NL02.10)
- **Quality:** Ohaus quality management system registered to ISO 9001:2000

### Outline Dimensions

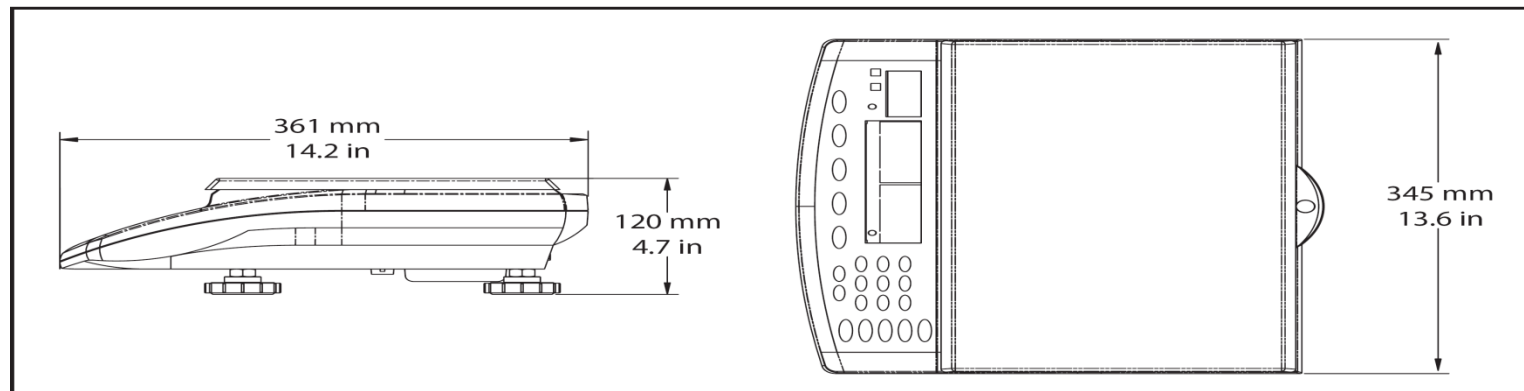

Panasonic Kenko Electric Co, Lt  
36 Sisenju, Okio, Osaka 234-23354 Japan  
Tel. 81-32-565434667